



STAYFIX

Drainage Detail

Machine 30mm x 5mm drainage slot 100mm from each end at minimum 600mm centres

Equalize pressure inside cavity by interrupting outer seal or by breathing holes.


Equalize pressure inside glaze and frame cavity by breathing holes on height of frame, Mullion and sash.

Drain under side of glass.


If drain through Cill - Block both ends.

Ensure that drainage path is not obstructed by fixings.

Seal Corners and Cill Joints to ensure that a watertight joint is created on inside of frame.

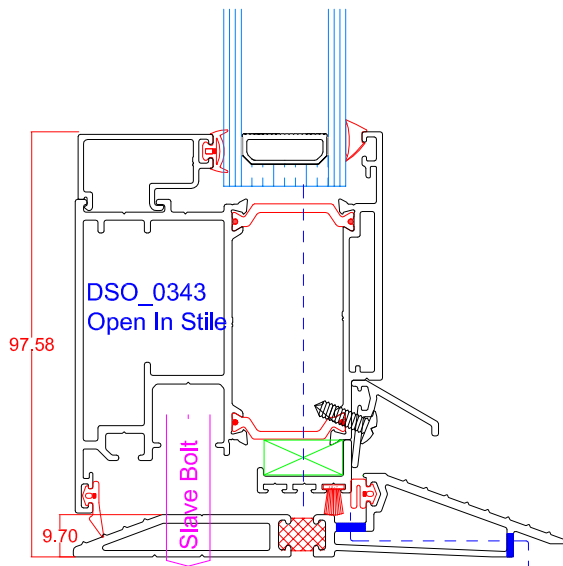

Open In - Rebated Low threshold

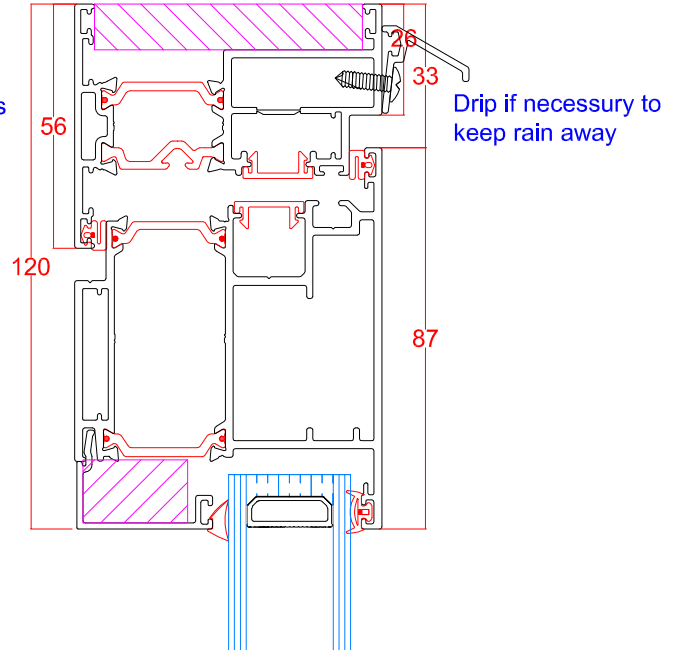

Open Out Door

